


Standard made of AMAPLAST, protection type IP 44¹⁾

pre-wired for installation, enclosure front cover electric grey, yellow or silver, hinged to the side. Fusing behind a transparent cover. With suspension eyes on top, grip hooks on the bottom and chain set provided. The receptacle combinations can be ordered in electric grey RAL 7035, yellow RAL 1021 or silver RAL 9006. To order in yellow or silver, please add the appropriate colour code to the order number (yellow = GE, silver = SI).

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations.

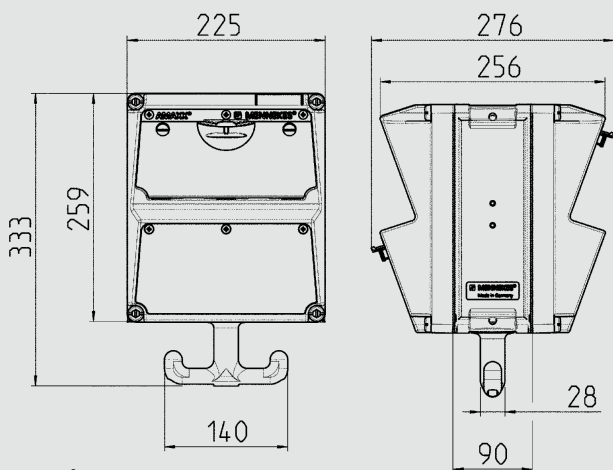

Drawing 1 MB 630

Depth dimensions for identical configuration on both sides.

Receptacles	Protection type	Depth
SCHUKO® 16A, 230V	IP 44	282 mm
	IP 67	326 mm
CEE 16A, 3p, 230V	IP 44	342 mm
	IP 67	350 mm
CEE 16A, 5p, 400V	IP 44	354 mm
	IP 67	362 mm
CEE 32A, 5p, 400V	IP 44	372 mm
	IP 67	382 mm



CEE receptacles

2 CEE 16A, 5p, 400V

CEE receptacles

Receptacles SCHUKO®

4 SCHUKO® 16A, 230V

Fusing

1 RCD 40A, 4p, 0.03A
2 MCB's 16A, 3p, C
4 MCB's 16A, 1p, C

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Enclosure size

260 x 225 mm (H x W)

Part no.

970004*



CEE receptacles

1 CEE 32A, 5p, 400V
1 CEE 16A, 5p, 400V

CEE receptacles

Receptacles SCHUKO®

3 SCHUKO® 16A, 230V

Fusing

1 RCD 40A, 4p, 0.03A
1 MCB 16A, 3p, C
3 MCB's 16A, 1p, C

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Enclosure size

260 x 225 mm (H x W)

Part no.

970002*

Standard made of AMAPLAST, protection type IP 44¹⁾

pre-wired for installation, enclosure front cover electric grey, yellow or silver, hinged to the side. Fusing behind a transparent cover. With suspension eyes on top, grip hooks on the bottom and chain set provided. The receptacle combinations can be ordered in electric grey RAL 7035, yellow RAL 1021 or silver RAL 9006. To order in yellow or silver, please add the appropriate colour code to the order number (yellow = GE, silver = SI).

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations.



CEE receptacles

1 CEE 32A, 5p, 400V
1 CEE 16A, 5p, 400V

Data port sockets

1 Cepex RJ45, 2 fold
Cat.6

Receptacles SCHUKO®

3 SCHUKO® 16A, 230V

Fusing

1 RCD 40A, 4p, 0.03A
1 MCB 16A, 3p, C
3 MCB's 16A, 1p, C

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Enclosure size

260 x 225 mm (H x W)

Part no.

970005*



CEE receptacles

1 CEE 32A, 5p, 400V
1 CEE 16A, 5p, 400V

CEE receptacles

Receptacles SCHUKO®

4 SCHUKO® 16A, 230V

Fusing

1 RCD 40A, 4p, 0.03A
1 MCB 32A, 3p, C
1 MCB 16A, 3p, C
4 MCB's 16A, 1p, C

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Enclosure size

260 x 225 mm (H x W)

Part no.

970001*



CEE receptacles

1 CEE 32A, 5p, 400V
1 CEE 16A, 5p, 400V

CEE receptacles

Receptacles SCHUKO®

4 SCHUKO® 16A, 230V

Fusing

1 LS 32A, 3p, C
1 MCB 16A, 3p, C
4 MCB's 16A, 1p, C

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Enclosure size

260 x 225 mm (H x W)

Part no.

970003*



Pneumatic connection

for AMAXX® hanging

for tube NW 9 mm,
Part no. 997001

for tube NW 13 mm,
Part no. 997000

Part no. 997001

Part no. 997000

Set of chains

are provided with each
suspendable AMAXX®
receptacle combination.



Receptacle combinations ■ Hanging, AirKRAFT®

Standard made of AMAPLAST, protection type IP 44¹⁾

pre-wired for installation, back box in black, cover available in red (RO), yellow (GE) or silver (SI).

Other combinations on request.

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations and RJ45 data sockets.



Fitted with

1 CEE 16A, 5p, 400V
3 SCHUKO® 16A, 230V

Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94550SI



Fitted with

4 SCHUKO® 16A, 230V


Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94551RO

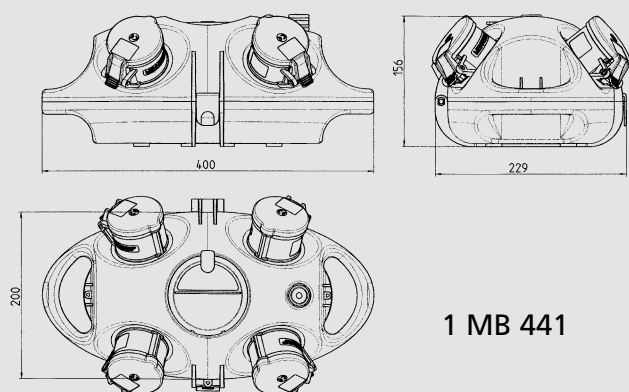

DIN rail / fusing for 4 modules beneath transparent operating lid.

Cable entry: at the top: 1 x M 32, 1 x M 25, 2 x M 20 (blind, to be cut out), 1 x cut out for quick pneumatic connection; from the side (for wall fixing or portable version):

1 x M 25 (blind, to be cut out).

When ordering AirKRAFT® please add to the part no. the colour code of the cover, i. e.

red = RO, yellow = GE, silver = SI.



Fitted with

3 SCHUKO® 16A, 230V
1 RJ45 double data port
cat.6, 8/8

Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94554GE



Fitted with

1 CEE 16A, 5p, 400V
2 SCHUKO® 16A, 230V
1 RJ45 double data port
cat.6, 8/8

Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94555GE

Standard made of AMAPLAST, protection type IP 44¹⁾

pre-wired for installation, back box in black, cover available in red (RO), yellow (GE) or silver (SI).

Other combinations on request.

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations and RJ45 data sockets.



Fitted with

1 CEE 16A, 5p, 400V
2 NF 16A, 2p+E, 230V
1 RJ45 double data port
cat.6, 8/8

Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94555FG



Fitted with

1 CEE 16A, 5p, 400V
3 NF 16A, 2p+E, 230V


Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94550FS



Set of chains

for fixing AirKRAFT® to the
ceiling

Part no. 106060



Pneumatic connection

for 3KRAFT® and
AirKRAFT®

for tube dia. 9 mm

Part no. 208620

for tube dia. 13 mm

Part no. 208621

duplex

When used in 3KRAFT® and
AirKRAFT® an additional
one-way pneumatic quick
connect part no. 208620 or
208621) is still needed!

Part no. 41442

Receptacle combinations ■ Hanging, 3KRAFT®

Standard made of AMAPLAST, protection type IP 44¹⁾

pre-wired for installation, back box in black, cover available in red (RO), yellow (GE) or silver (SI).

Other combinations on request.

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations and RJ45 data sockets.

Receptacle combinations



Fitted with
3 SCHUKO® 16A, 230V

Fusing

Connection/feeder cable
For 1 cable up to
3 x 6 mm²

Part no.
94351GE




Fitted with
1 CEE 16A, 5p, 400V
2 SCHUKO® 16A, 230V

Fusing

Connection/feeder cable
For 1 cable up to
5 x 10 mm²

Part no.
94350SI

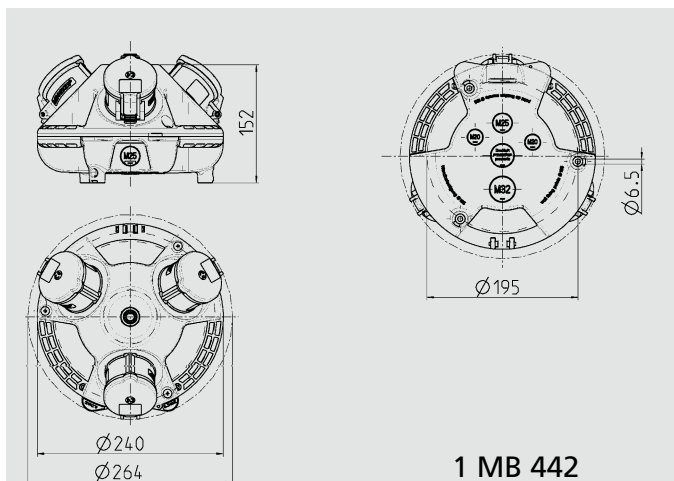

Cable entry:

at the top: 1 x M 32, 1 x M 25, 2 x M 20 (blind, to be cut out), 1 x cut out for quick pneumatic connection;
from the side (for wall fixing or portable version):

1 x M 25 (blind, to be cut out).

When ordering 3KRAFT® please add to the part no. the colour code of the cover, i. e.

red = RO, yellow = GE, silver = SI.



Fitted with
1 CEE 16A, 5p, 400V
1 SCHUKO® 16A, 230V
1 RJ45 double data port
cat.6, 8/8

Fusing

Connection/feeder cable
For 1 cable up to
5 x 10 mm²

Part no.
94355GE



Fitted with
2 SCHUKO® 16A, 230V
1 RJ45 double data port
cat.6, 8/8

Fusing

Connection/feeder cable
For 1 cable up to
3 x 6 mm²

Part no.
94354SI

Standard made of AMAPLAST, protection type IP 44¹⁾

pre-wired for installation, back box in black, cover available in red (RO), yellow (GE) or silver (SI).

Other combinations on request.

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations and RJ45 data sockets.



Fitted with

3 NF 16A, 2p+E, 230V

Fusing

Connection/feeder cable

For 1 cable up to
3 x 6 mm²

Part no.

94351FR



Fitted with

1 CEE 16A, 4p, 400V
1 NF 16A, 2p+E, 230V
1 RJ45 double data port
cat.6, 8/8

Fusing

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

94355FG



Set of chains

for fixing 3KRAFT® to the
ceiling

Part no. 106123



Pneumatic connection

for 3KRAFT® and
AirKRAFT®

for tube dia. 9 mm

Part no. 208620

for tube dia. 13 mm

Part no. 208621

duplex

When used in 3KRAFT® and
AirKRAFT® an additional
one-way pneumatic quick
connect part no. 208620 or
208621) is still needed!

Part no. 41442


Receptacle combinations ■ Hanging, DELTA-BOXES

Standard made of AMAPLAST, high resistant to chemicals AMELAN®, protection type IP 44¹⁾ / IP 67 / IP 68

pre-wired for installation, with cable grip and installed hanging hook.

Other combinations on request.

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations.

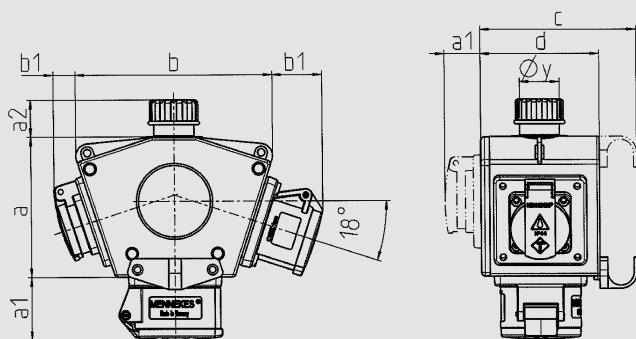

3 MB 44			
Pos.	Receptacles	IP-degrees	Dim.
a			114.0 mm
a1	SCHUKO®, 16A, 230V	IP 44	max. 30.0 mm
a1	CEE 16A, 3p, 230V	IP 44	52.7 mm
a1	CEE 16A, 5p, 400V	IP 44	50.5 mm
a1	CEE 32A, 5p, 400V	IP 44	64.0 mm
a2			30.0 mm
b			160.0 mm
b1	SCHUKO®, 16A, 230V	IP 44	max. 18.0 mm
b1	CEE 16A, 3p, 230V	IP 44	42.0 mm
b1	CEE 16A, 5p, 400V	IP 44	40.0 mm
b1	CEE 32A, 5p, 400V	IP 44	53.2 mm
c			133.0 mm
d			97.0 mm
y			17.0 mm



Fitted with
3 SCHUKO® 16A, 230V
hinged bayonet lock lid

Protection type
IP 68

Connection/feeder cable
For 1 cable up to
3 x 10 mm²

Part no.
10860




Fitted with
3 SCHUKO® 16A, 230V
hinged bayonet lock lid
attached by a strap

Protection type
IP 68

Connection/feeder cable
For 1 cable up to
3 x 10 mm²

Part no.
10859

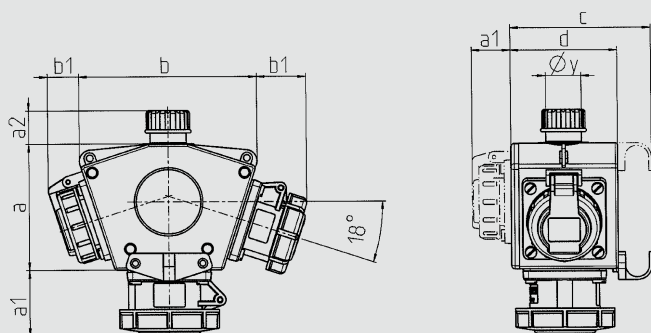

3 MB 45			
Pos.	Receptacles	IP-degrees	Dim.
a			114.0 mm
a1	SCHUKO®, 16A, 230V	IP 68	35.0 mm
a1	CEE 16A, 3p, 230V	IP 67	56.3 mm
a1	CEE 16A, 5p, 400V	IP 67	59.0 mm
a2			30.0 mm
b			160.0 mm
b1	SCHUKO®, 16A, 230V	IP 44	24.0 mm
b1	CEE 16A, 3p, 230V	IP 44	44.3 mm
b1	CEE 16A, 5p, 400V	IP 44	47.0 mm
c			133.0 mm
d			97.0 mm
y			17.0 mm



Fitted with
3 CEE 16A, 3p, 230V

Protection type
IP 44

Connection/feeder cable
For 1 cable up to
5 x 10 mm²

Part no.
92898



Fitted with
3 CEE 16A, 3p, 230V

Protection type
IP 67

Connection/feeder cable
For 1 cable up to
5 x 10 mm²

Part no.
92895

Standard made of AMAPLAST, high resistant to chemicals AMELAN®, protection type IP 44¹⁾ / IP 67 / IP 68

pre-wired for installation, with cable grip and installed hanging hook.

Other combinations on request.

¹⁾ See comment on page 45 to protection degree IP 44 for portable combinations.



Fitted with

1 CEE 16A, 5p, 400V
2 SCHUKO® 16A, 230V

Protection type

IP 44

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

92915



Fitted with

1 CEE 16A, 5p, 400V
2 SCHUKO® 16A, 230V

Protection type

IP 67

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

92910



Fitted with

1 CEE 16A, 5p, 400V
2 SCHUKO® 16A, 230V

Protection type

IP 67

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

83699



Pneumatic connection

for DELTA-BOX and mobile
receptacle combinations

for tube dia. 9 mm,
Part no. 41440

for tube dia. 13 mm,
Part no. 41441

Part no. 41440

Part no. 41441



Fitted with

3 CEE 16A, 5p, 400V

Protection type

IP 44

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

92917



Fitted with

3 CEE 16A, 5p, 400V

Protection type

IP 67

Connection/feeder cable

For 1 cable up to
5 x 10 mm²

Part no.

92912

Hanging clip

supplied with every
DELTA-BOX.

